

JACE 8000 controller

PRODUCT DEFINITION

The JACE® 8000 is a compact, embedded IoT (Internet of Things) controller and server platform for connecting multiple and diverse devices and sub-systems. With internet connectivity and web-serving capability, the JACE 8000 controller provides integrated control, supervision, data logging, alarming, scheduling and network management. It streams data and rich graphical displays to a standard web browser via an Ethernet or wireless LAN, or remotely over the internet. VYKON Enterprise Security is a Niagara AX-based application that runs on the JACE 8000. VYKON Integrated Analytics 2.0 is a data analytics extension to the Niagara Framework® available on JACE 8000 controllers.

The licensing model for the JACE 8000 controller is simplified and features standard drivers, along with optional IO and field bus expansion modules for ultimate flexibility and expandability. The JACE 8000 controller operates with Niagara 4, the latest version of the Niagara Framework, for optimum performance. In larger facilities, multi-building applications and large-scale control system integrations, Niagara 4 Supervisors can be used with JACE 8000 controllers to aggregate information, including alarms, and historical and real-time data, to create a single, unified application.



HARDWARE SPECIFICATIONS

TI AM3352: 1000MHz ARM® Cortex™-A8

1GB DDR3 SDRAM

Removable micro-SD card with 4GB flash total storage/2GB user storage

*Wi-Fi (Client or WAP)
IEEE802.11a/b/g/n
IEEE802.11n HT20 @ 2.4GHz
IEEE802.11n HT20/HT40 @ 5GHz
Configurable radio (Off, WAP, or Client)
WPAPSK/WPA2PSK supported

*USB type A connector
Back-up and restore support

(2) isolated RS-485 with selectable bias and termination

(2) 10/100MB Ethernet ports

Secure boot

**Supply requirements: 24VAC rated at 24VA minimum, or 24VDC rated at 1A (24W) minimum

Runs Niagara AX: 3.8u1 and later

Runs Niagara 4: 4.1 and later

VYKON Integrated Analytics 1.1 requires Niagara AX 3.8u1 or later update builds

VYKON Integrated Analytics 2.0 requires Niagara 4.2 and later

Real-time clock

Batteryless

*Not supported with Niagara AX

**VYKON Enterprise Security requires four hours of standby power

JACE® 8000 ORDERING INFORMATION: VYKON INTEGRATED ANALYTICS 2.0

JACE 8000 SERIES ORDERING INFORMATION

Part number*	Description
NA-EC-N4-100	Niagara Analytics Framework (on Niagara 4) license for 100 analytic points for an Embedded Controller (JACE 8000)
NA-EC-N4-250	Niagara Analytics Framework (on Niagara 4) license for 250 analytic points for an Embedded Controller (JACE 8000)
NA-EC-N4-500	Niagara Analytics Framework (on Niagara 4) license for 500 analytic points for an Embedded Controller (JACE 8000)
NA-EC-N4-1000	Niagara Analytics Framework (on Niagara 4) license for 1,000 analytic points for an Embedded Controller (JACE 8000)

INCLUSION OF ANALYTIC POINTS AS A BASE

Part number*	Description
NA-N4-BASE-25	Niagara Analytics Framework (on Niagara 4) license for 25 analytic points for an Embedded Controller (JACE 8000) or Supervisor. Requires NO additional purchase of SMA (included as part of core Niagara 4 SMA)

*Effective September 9, 2016

VYKON Integrated Analytics 2.0 licenses are conveniently and cost-effectively based on the number of analytical points and do not expire. Niagara 4 includes a Software Maintenance Agreement (SMA) that covers all VYKON Integrated Analytics enhancements, adding to the value of the SMA when you invest in Niagara 4.

KEY ADVANTAGES

- Data analysis at the onsite JACE controller level
- Real-time on-premise analytic control

Find additional data sheets for
VYKON Integrated Analytics 2.0
on VYKON's website

EXPANSION MODULE AND IO CONFIGURATIONS

MAXIMUM EXPANSION (MODULES SUPPORTED)

- NPB-8000-LON (4)
- NPB-8000-232 (4)
- NPB-8000-2X-485 (2)

MAXIMUM IO (MODULES SUPPORTED)*

- IO-16-485 (16)*
- IO-R-16 (16)*
- IO-R-34 (8)*

*See JACE 8000 IO R data sheet for configuration details


MAXIMUM VYKON ENTERPRISE SECURITY (MODULES SUPPORTED)*

- SEC-R2R*
- SEC-RIO*

*16 total each or combined

MAXIMUM VYKON ENTERPRISE SECURITY INTRUSION KEYPADS

- SEC-INT-KP (6)

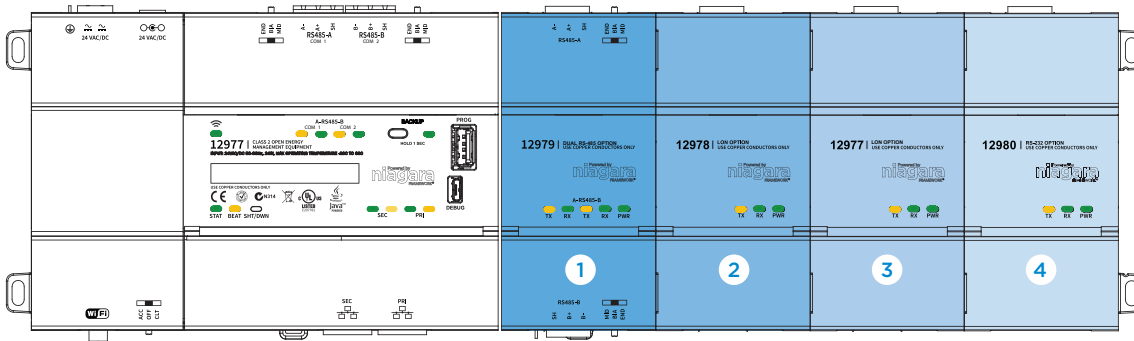

MAXIMUM COMBINATIONS


EXPANSION 1	EXPANSION 2	EXPANSION 3	EXPANSION 4
232 or LON	232 or LON	232 or LON	232 or LON
485	232 or LON	232 or LON	232 or LON
485	485	232 or LON	
485	485		

Expandability is dependent on the type of expansion module used



JACE® 8000 CONTROLLER MOUNTING & DIMENSIONS

- 1 JACE 8000 controller. Allow at least 1.5" (38mm) clearance around all sides and minimum 3" (76mm) at bottom for Wi-Fi antenna
- 2 Expansion module. Up to four (4) may be used. See "Expansion Module and IO Configurations"
- 3 Distances between center of tabs from one unit to another unit

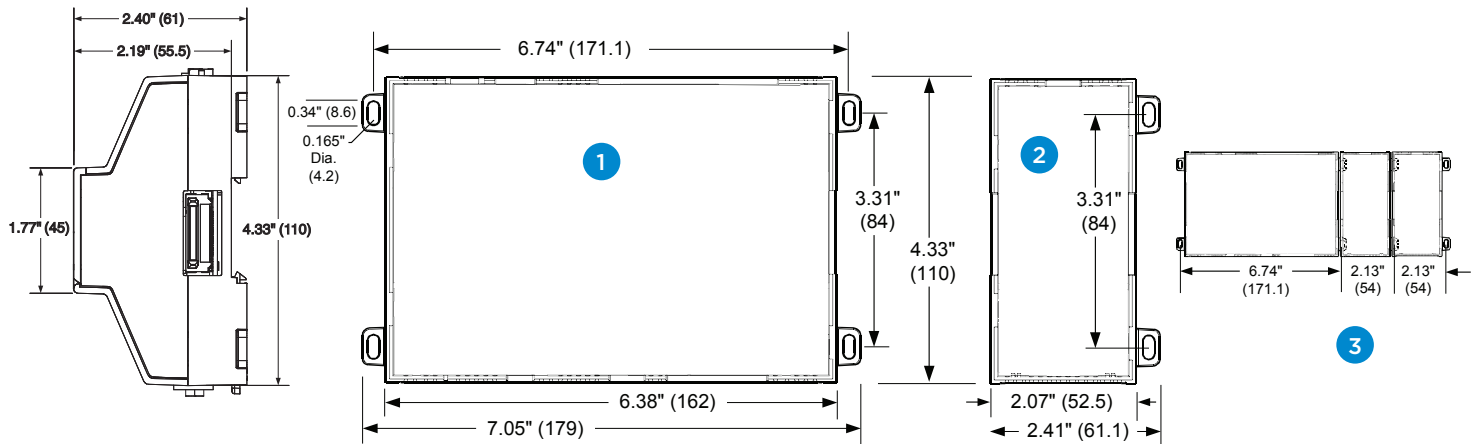

Compatible with (DIN43880) enclosures

Suitable for mounting to a panel or to an EN50022 standard 35mm rail

Vizio stencils available upon request

AGENCY CERTIFICATIONS

- UL 916
- CE EN 61326-1
- RCM
- FCC Part 15 Subpart B, Class B
- FCC Part 15 Subpart C
- C-UL listed to Canadian Standards Association (CSA) C22.2 No. 205-M1983 "Signal Equipment"
- 1999/5/EC R&TTE Directive
- CCC
- SRRC
- RSS
- RoHS

ENVIRONMENTAL SPECIFICATIONS

- **Operating temperature:** -20-60°C
- **Storage temperature:** -40-85°C
- **Humidity:** 5%-95% — Non condensing
- **Shipping & vibration:** ASTM D4169, Assurance Level II
- **MTTF:** 10 years+

Contact support@tridium.com
for the latest agency certifications
or global shipping guide

JACE 8000 ORDERING INFORMATION

Part number	Description
JACE-8000	Base unit includes two isolated RS485 ports, two 10/100MB Ethernet ports, USB Backup & Restore and Wi-Fi connectivity
JACE-8000-DEMO	Base unit includes two isolated RS485 ports, two 10/100MB Ethernet ports, USB Backup & Restore, Wi-Fi connectivity, all available Tridium drivers and a 500 device license. Hardware Accessories purchased separately. Available with VYKON Integrated Analytics 2.0 (non-production only).
NC-8XXX-DEMO	JACE 8000 Demo with 500 Device Core. Includes all available Tridium drivers. Requires Niagara 4.1 or higher. Available with VYKON Integrated Analytics 2.0 (non-production only). License will renew annually with the receipt of the annual support fee.
NC-8005	Up to 5 devices/250 point core
NC-8010	Up to 10 devices/500 point core
NC-8025	Up to 25 devices/1,250 point core
NC-8100	Up to 100 devices/5,000 point core
NC-8200	Up to 200 devices/10,000 point core
DEVICE-10	Up to 10 devices/500 point upgrade (can be purchased during initial licensing)
DEVICE-25	Up to 25 devices/1,250 point upgrade (can be purchased during initial licensing)
DEVICE-50	Up to 50 devices/2,500 point upgrade (can be purchased during initial licensing)
DEVICE-UP-10	Up to 10 devices/500 point upgrade (can be purchased post initial licensing)
DEVICE-UP-25	Up to 25 devices/1,250 point upgrade (can be purchased post initial licensing)
DEVICE-UP-50	Up to 50 devices/2,500 point upgrade (can be purchased post initial licensing)
JACE-8000-AX	Enables JACE 8000 controller to run Niagara AX 3.8u1 or later
NPB-8000-2X-485	JACE 8000 controller — add on dual port RS-485 module
NPB-8000-LON	JACE 8000 controller — add on single port LON FTT10A module
NPB-8000-232	JACE 8000 controller — add on single port RS-232 module
WPM-8000	Universal power supply for JACE 8000 controller
IO-16-485	Remote IO module, compatible with the JACE 8000 controller. Communication using RS 485, maximum IO supported IO-16-485 modules: 16
NPB-PWR	24V power supply for IO-16-485
NPB-PWR-UN	Universal power supply for IO-16-485
IO-R-16	Optional 16 point IO RS485 module designed for use with the JACE 8000 — Includes 8 Universal Inputs, 4 Form A Relay Outputs and 4 0-10 VDC Analog Outputs.
IO-R-34	Optional 34 point IO RS485 module designed for use with the JACE 8000 — Includes 16 Universal Inputs, 10 Form A Relay Outputs and 8 0-10 VDC Analog Outputs.

JACE 8000s include a Niagara 4 license and Tridium's standard drivers.
Please see Tridium's Niagara 4 drivers documentation for more details.

JACE® 8000 ORDERING INFORMATION: VYKON ENTERPRISE SECURITY

VYKON ENTERPRISE SECURITY ON THE JACE 8000

Part number	Description
SEC-J8-AX	VYKON Enterprise Security license for JACE 8000 controller. Includes licensing for 32 readers (not included in capacity). Also includes JACE 8000 Niagara AX license option (JACE-8000-AX). Does not include the JACE 8000 controller.

JACE ACCESSORIES FOR VYKON ENTERPRISE SECURITY

Part number	Description
SEC-R2R	Security module for 2 readers/access doors and 2 digital inputs
SEC-RIO	Security module with 8 supervised inputs, 8 relay outputs and 2 digital inputs
SEC-INT-KP	Intrusion keypad with LCD display for arming/disarming security zones
SEC-ENC-LNP	Large enclosure with keyed lock, door status switch, and 2 din rails for mounting JACE 8000 controller and up to 4 remote reader modules or 2 remote IO modules. Several other combinations of devices may be mounted in this panel. Dimensions: 17"W x 22"H x 4"D.

Find additional data sheets for
the VYKON Enterprise Security
application on VYKON's website

To learn more about how to purchase, install and start using the JACE 8000 controller, contact your VYKON partner. The global community of certified Niagara professionals can serve your unique business needs across any industry or geographic region.



vykon.com

© 2017 Tridium Inc. All rights reserved. All other trademarks and registered trademarks are properties of their respective owners.

Information and/or specifications published here are current as of the date of publication of this document. Tridium, Inc. reserves the right to change or modify specifications without prior notice. The latest product specifications can be found by contacting our corporate headquarters, Richmond, Virginia. Products or features contained herein may be covered by one or more U.S. or foreign patents. This document may be copied only as expressly authorized by Tridium in writing. It may not otherwise, in whole or in part, be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form.

2017-0001VK